



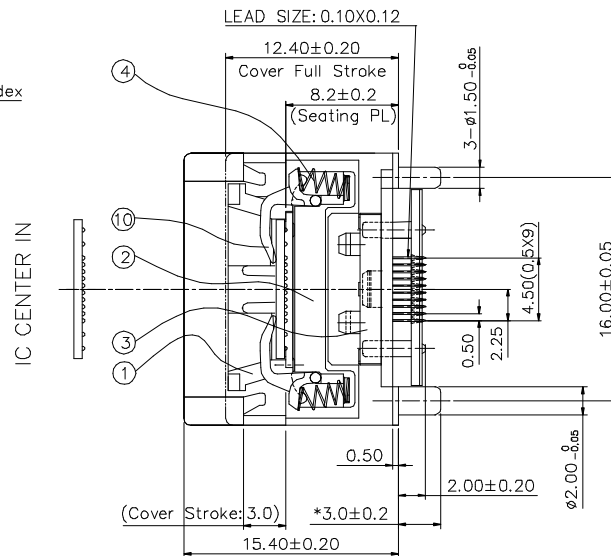


SPECIFICATION	
CONTACT RESISTANCE	50m Ω or less at 10mA (initial)
OPERATING TEMPERATURE	(-65℃) - (+150℃)
ACTION FORCE	Max 1.8Kg


PARTS LIST				
NO	NAME	MATERIAL	Q'TY	FINISH
1	ADAPTER	PEI(GF)	1	(Black)
2	SLIDER	PEI(GF)	1	(Black)
3	STOPPER	PEI(GF)	1	(Black)
4	LATCH SPRING	SUS	2	
5	LEAD GUIDE	PEI(GF)	1	
6	CONTACT	BeCu	40	Ni+Au
7	BASE	PEI(GF)	1	(Black)
8	COVER SPRING	SUS	4	
9	COVER	PEI(GF)	1	(Black)
10	LATCH	PEI(GF)	2	(Black)
11	SLIDER SPRING	SUS	1	

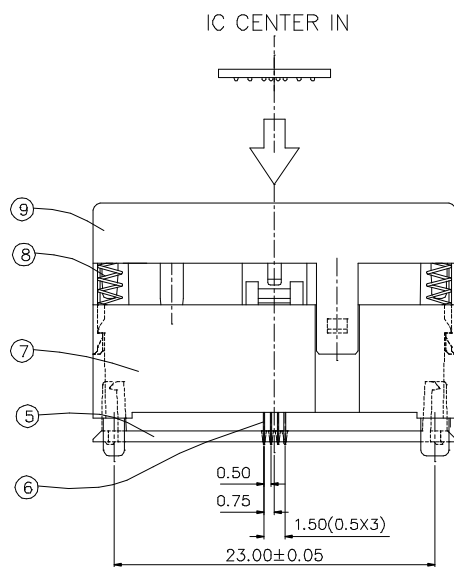

IC Dimension
48-TBGA-10.0X8.0



(Top View)




(Bottom View)

DRAWN 2001.12.12

DATE _____

DWG NO	CH-01096-A
--------	------------

PCB Layout(TOP VIEW)

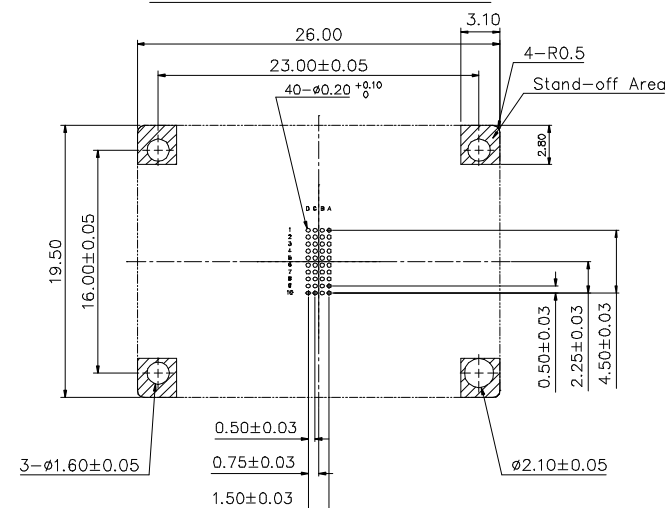

			DRAWN	DATE									
			DESIGNED	02.06.11									
			CHECKED	D.W.Hwang	TITLE 0.5P-BGA Socket 48-TBGA-10.0X8.0								
REF.	NEXT ASS'Y	USED ON	VERIFIED										
COMMON TOLERANCES			APPROVED		SIZE A3								
NUMERIC ± 0.10		ANGLE ±	D.W.Hwang							DWG NO SB040FA-SA			
					SCALE		NS	UNIT	mm				