

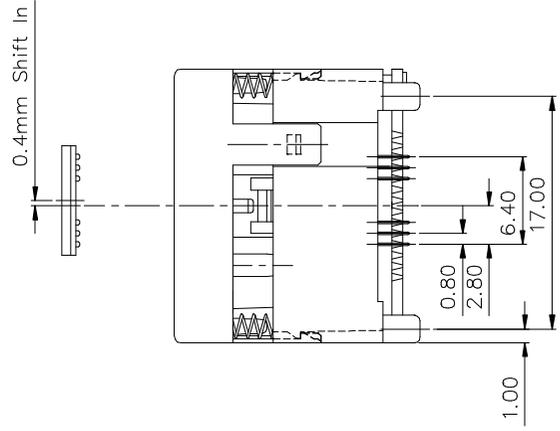
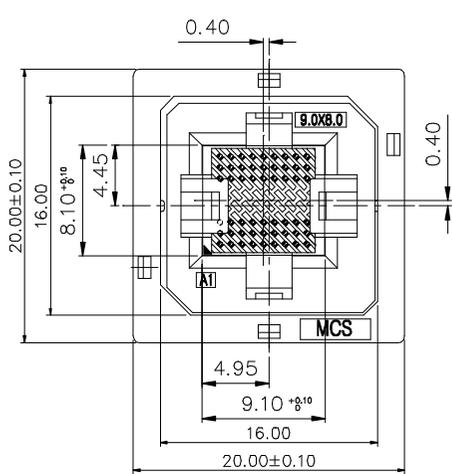
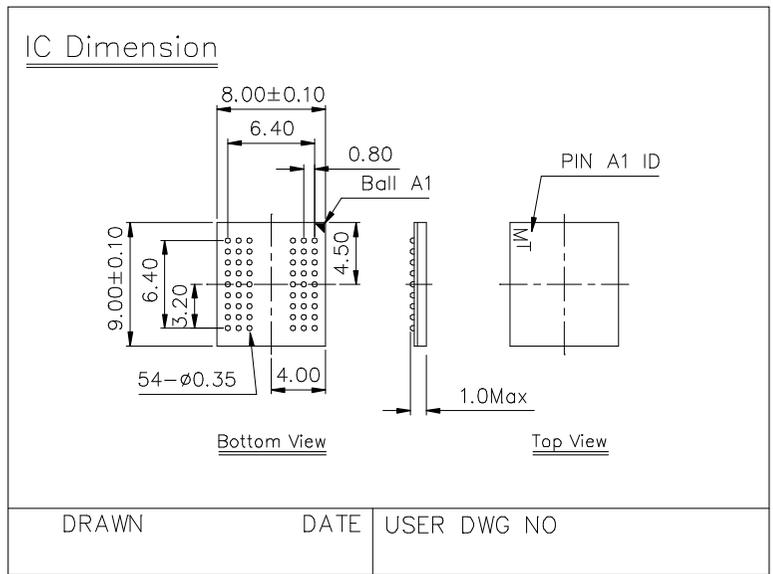


SPECIFICATION	
CONTACT RESISTANCE	100m Ω or less at 10mA (initial)
OPERATING TEMPERATURE	(-65°C) - (+150°C)
ACTUATION FORCE	Max 1.8Kg

PARTS LIST				
NO	NAME	MATERIAL	Q'TY	FINISH
1	IC GUIDE	PEI(GF)	1	
2	SLIDE	PEI(GF)	1	
3	ADAPTER	PEI(GF)	1	
4	HOLDER SPRING	SUS	2	
5	CONTACT GUIDE	PEI(GF)	1	
6	CONTACT	BeCu	54	
7	BODY	PEI(GF)	1	
8	COVER SPRING	SUS	4	
9	COVER	PEI(GF)	1	
10	IC HOLDER	PEI(GF)	2	
11	SLIDE SPRING	SUS	1	

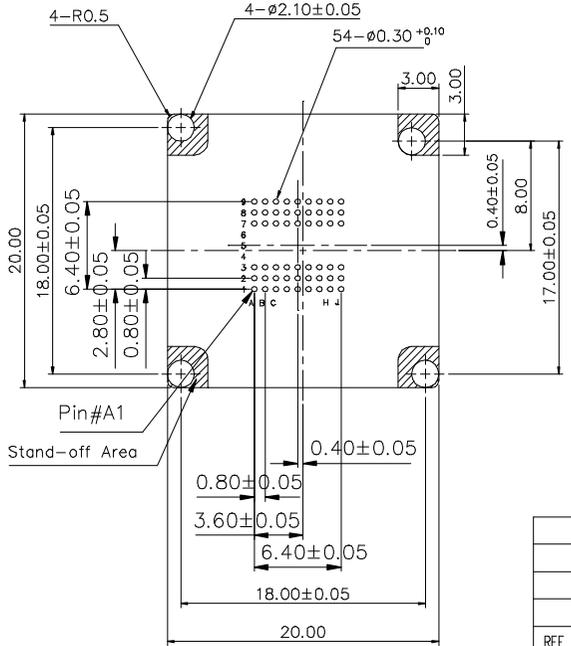

PCB Layout(TOP VIEW)

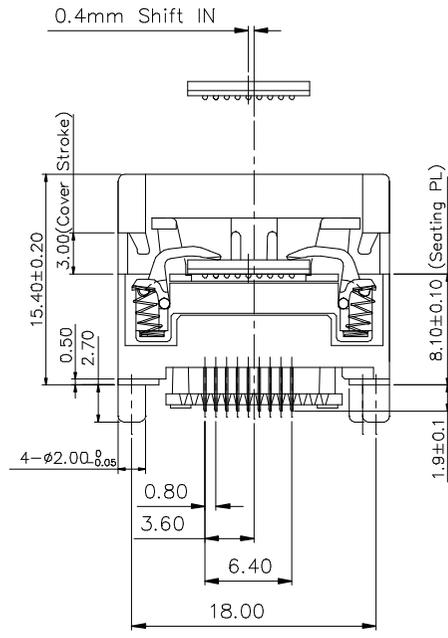

DRAWN DATE USER DWG NO

REF.	NEXT ASS'Y	USED ON	DRAWN DATE	
			DESIGNED	
			CHECKED	
			VERIFIED	
			APPROVED	
COMMON TOLERANCES				TITLE
NUMERIC	ANGLE			20X20-0.8P SOCKET
± 0.15	± 1°			BGA-54B-9.0X8.0
				SIZE
				A3
				DWG NO
				SB054E-TA
				SCALE
				UNIT mm
				SHEET 1 OF 1