
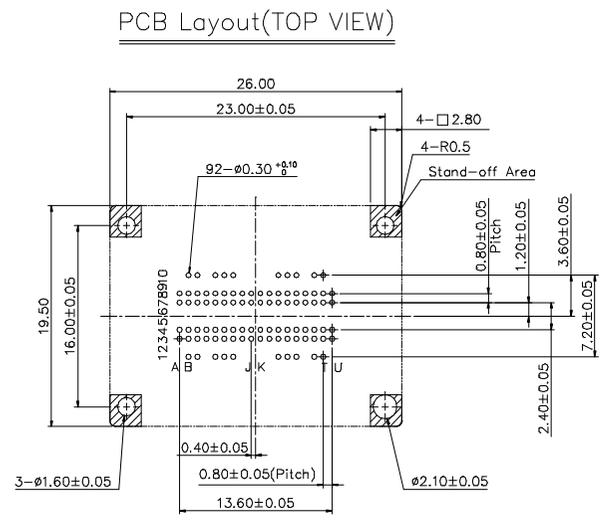
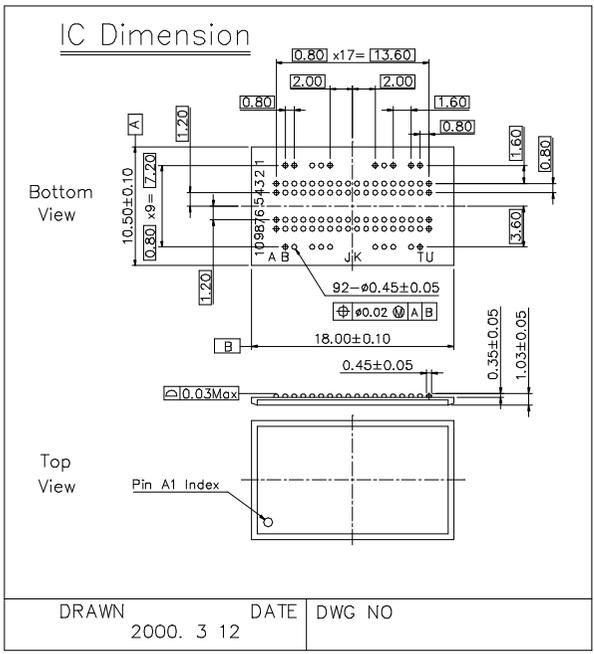
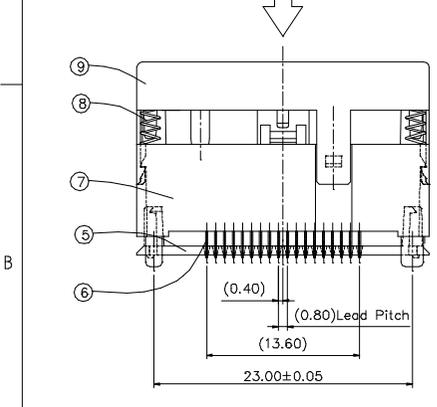
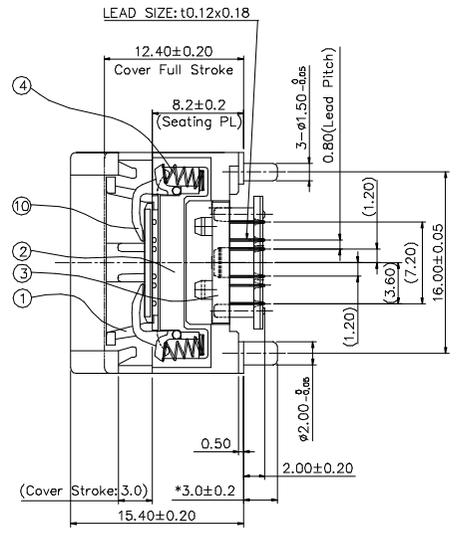


SPECIFICATION	
CONTACT RESISTANCE	50mΩ or less at 10mA (initial)
DIELECTRIC WITHSTANDING VOLTAGE	100VAC for 1 Minute
INSULATION RESISTANCE	1000MΩ or more at 100VDC
RATED CURRENT	1A
OPERATING TEMPERATURE	(-65°C) - (+150°C)
ACTUATION FORCE	Max 1.8Kg

PARTS LIST				
NO	NAME	MATERIAL	Q'TY	FINISH
1	ADAPTER	PEI(GF)	1	(Black)
2	SLIDER	PEI(GF)	1	(Black)
3	STOPPER	PEI(GF)	1	(Black)
4	LATCH SPRING	SUS	2	
5	LEAD GUIDE	PEI(GF)	1	
6	CONTACT	BeCu	92	Ni+Au
7	BASE	PEI(GF)	1	(Black)
8	COVER SPRING	SUS	4	
9	COVER	PEI(GF)	1	(Black)
10	LATCH	PEI(GF)	2	(Black)
11	SLIDER SPRING	SUS	1	

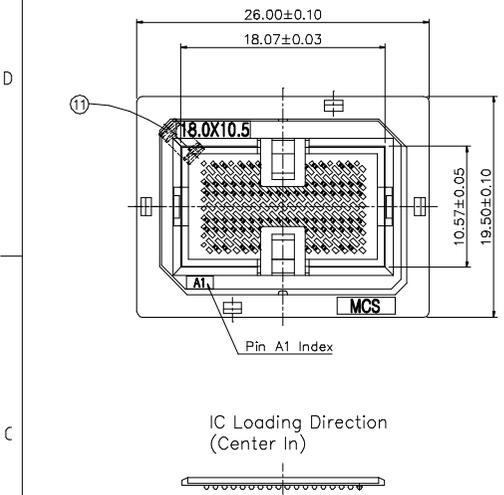

			DRAWN	DATE	<b>MCS Micro Contact Solution</b>
			'00.09.23		
			DESIGNED		TITLE
			D.W.Hwang		
REF.	NEXT ASS'Y	USED ON	CHECKED		BGA Socket-92B
			VERIFIED		
COMMON TOLERANCES			APPROVED		SIZE
NUMERIC	ANGLE		D.W.Hwang		DWG NO
± 0.10	±				SB092E-SB
			SCALE	NS	UNIT mm SHEET 1 OF 1